

FL570

Class 2 LED Flood Light


FL570
140D
Wattage
70W = 77W / 7,000lm

140W = 150W / 14,000lm

Voltage
LV = 120-277 VAC

HV = 277-480 VAC

Optic
140D = 140°

CCT
30K = 3000K

40K = 4000K

50K = 5000K

Mounting
S = Square Bracket

U = U-Bracket

Options

OPERATION

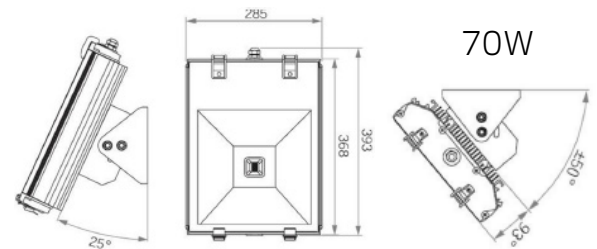
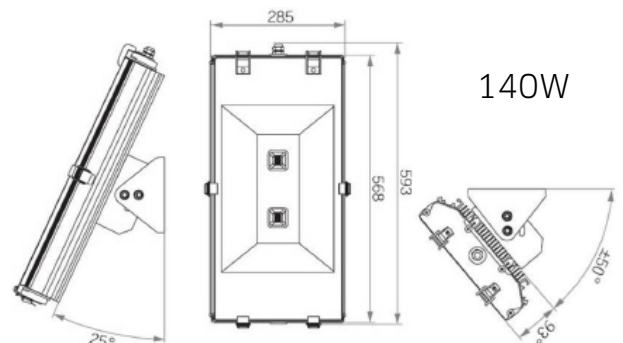
Array Lifetime	100,000+ Hours
Driver Lifetime	50,000 Hours
Voltage	120 - 277 VAC 277 - 480 VAC (Optional)
Operating Temperature	-40°C to 50°C
Optimal Temperature	-40°C to 35°C
Power Factor	> 0.93
Frequency	50/60 Hz
Colour Rendering Index	>70

CONSTRUCTION

Housing	Zinc-Coated Cast Aluminum
Lens	Tempered Glass - Frosted
Enclosure Rating	IP65
Dimensions (L x H x D)	70W: 393mm x 285mm x 93mm 140W: 593mm x 285mm x 93mm
Weight	70W: 8.3 kg / 18.3 lb 140W 12.6 kg / 27.7 lb

CERTIFICATIONS

Locations	Suitable for wet or dry locations
CSA Standards	CSA C22.2 No.250.0-08 CSA C22.2-137-M1981 (R2004)
UL Standards	UL 1598 (Edition 3) UL 8750 (Edition 1): 2009
Hazardous Locations	Class II, Div. 1, Groups E, F, G Class III


70W

140W